

22JU6

Beam Power Tube

NOVAR TYPE
SEPARATE GRID-No.3 BASE-PIN TERMINAL FOR "SNIVETS" CONTROL^h
For Horizontal-Deflection-Amplifier Service
in Low-B+, Black-and-White TV Receivers

Electrical:

Heater Characteristics and Ratings:

Current.	0.450 ± 0.030	amp
Voltage (AC or DC) at heater amperes = 0.450.	22.0	volts
Warm-up time (Average)	11	sec
Peak heater-cathode voltage:		
Heater negative with respect to cathode	200 max.	volts
Heater positive with respect to cathode	200 ^a max.	volts

Direct Interelectrode Capacitances

(Approx.)^b:


Grid No.1 to plate	1.2	pf
Input: G1 to (K,G3,G2,H)	22.0	pf
Output: P to (K,G3,G2,H)	9.0	pf

Mechanical:

Operating Position	Any
Type of Cathode.	Coated Unipotential
Maximum Overall Length	3.550"
Seated Length.	2.910" to 3.170"
Diameter	1.438" to 1.562"
Bulb	T12
Cap.	Skirted Miniature (JEDEC No.C1-2 or C1-3)
Socket	Novar

Bases (Alternates):

- Large-Button Novar 9-Pin (JEDEC No.E9-76)
- Large-Button Novar 9-Pin with Exhaust Tip (JEDEC No.E9-88)
- Basing Designation for BOTTOM VIEW. 9QL
- Pin 1 - Grid No.2
- Pin 2 - Grid No.1
- Pin 3 - Cathode
- Pin 4 - Heater
- Pin 5 - Heater
- Pin 6 - Grid No.1
- Pin 7 - Grid No.2
- Pin 8 - Grid No.3
- Pin 9 - Do Not Use
- Cap - Plate



Characteristics:

				Triode Connec- tion ^c	
Plate Voltage.	- 50 130	125	volts		
Peak Positive-Pulse Plate Voltage ^d	6500 - -	-	volts		



RADIO CORPORATION OF AMERICA
Electronic Components and Devices
Harrison, N. J.

DATA I
8-64

22JU6

	Triode Con- nec- tion ^c				
Grid No.3.	Connected to cathode at socket				
Grid-No.2 Voltage.	125	125	125	125	volts
Grid-No.1 Voltage.	-	0	-20	-20	volts
Amplification Factor	-	-	-	4.7	
Plate Resistance (Approx.)	-	-	18000	-	ohms
Transconductance	-	-	7000	-	μmhos
Plate Current.	-	470 ^e	45	-	ma
Grid-No.2 Current.	-	32 ^e	1.5	-	ma
Grid-No.1 Voltage (Approx.) for plate ma. = 1.	-75	-	-32	-	volts

HORIZONTAL-DEFLECTION AMPLIFIER

Maximum Ratings, Design-Maximum Values:

For operation in a 525-line, 30-frame system^f

DC Plate Supply Voltage.	770 max.	volts
Peak Positive-Pulse Plate Voltage ^g	6500 max.	volts
Peak Negative-Pulse Plate Voltage.	1500 max.	volts
DC Grid-No.3 Voltage ^h	75 max.	volts
DC Grid-No.2 (Screen-Grid) Voltage	220 max.	volts
DC Grid-No.1 (Control-Grid) Voltage:		
Negative-bias value.	55 max.	volts
Peak Negative-Pulse Grid-No.1 Voltage.	330 max.	volts
Cathode Current:		
Peak	950 max.	ma
Average.	275 max.	ma
Grid-No.2 Input.	3.5 max.	watts
Plate Dissipation ^j	17 max.	watts
Bulb Temperature (At hottest point on bulb surface)	220 max.	°C

Maximum Circuit Values:

Grid-No.1 Circuit Resistance:		
For grid-No.1-resistor-bias operation ^j	0.47 max.	megohm
For plate-pulsed operation (horizontal-deflection circuits only)	10 max.	megohms

^a The dc component must not exceed 100 volts.

^b Without external shield.

^c With grid No.2 connected to plate at socket.

^d Under conditions shown in footnote^g.

^e This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

^f As described in "Standards of Good Engineering Practice Concerning Television Broadcast Stations," Federal Communications Commission.

^g This rating is applicable where the duration of the voltage pulse does not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.

^h In horizontal-deflection-amplifier service, a positive voltage may be applied to grid No.3 to reduce interference from "snivets" which may occur in both vhf and uhf television receivers. A typical value for this voltage is 30 volts.


^j An adequate bias resistor or other means is required to protect the tube in the absence of excitation.

RADIO CORPORATION OF AMERICA
Electronic Components and Devices


Harrison, N. J.



22JU6

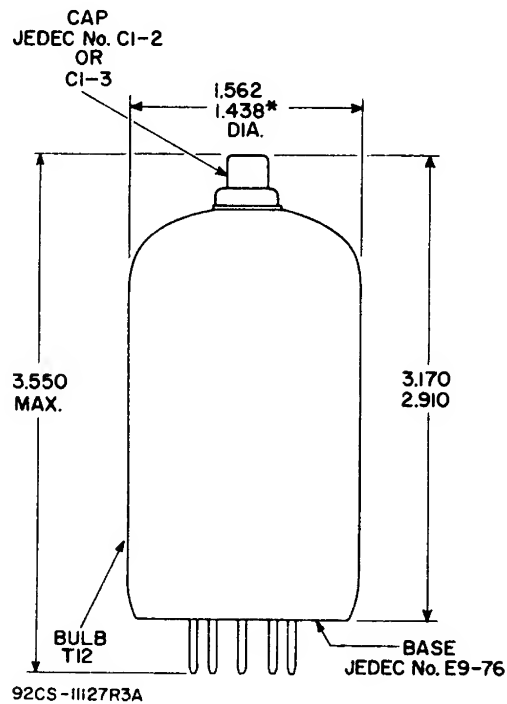

Alternative Base Bottom Exhaust

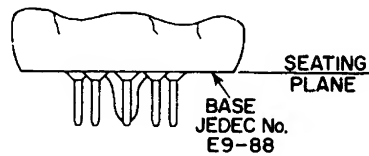

92CS-III27R3B

DIMENSIONS IN INCHES

A detailed drawing of the E9-88 base is available from RCA, Commercial Engineering 51-2, Harrison, N.J. 07029.

*Applies to the minimum diameter except in the area of the seal.




RADIO CORPORATION OF AMERICA
Electronic Components and Devices
Harrison, N. J.

DATA 2
8-64

22J6

AVERAGE PLATE CHARACTERISTICS

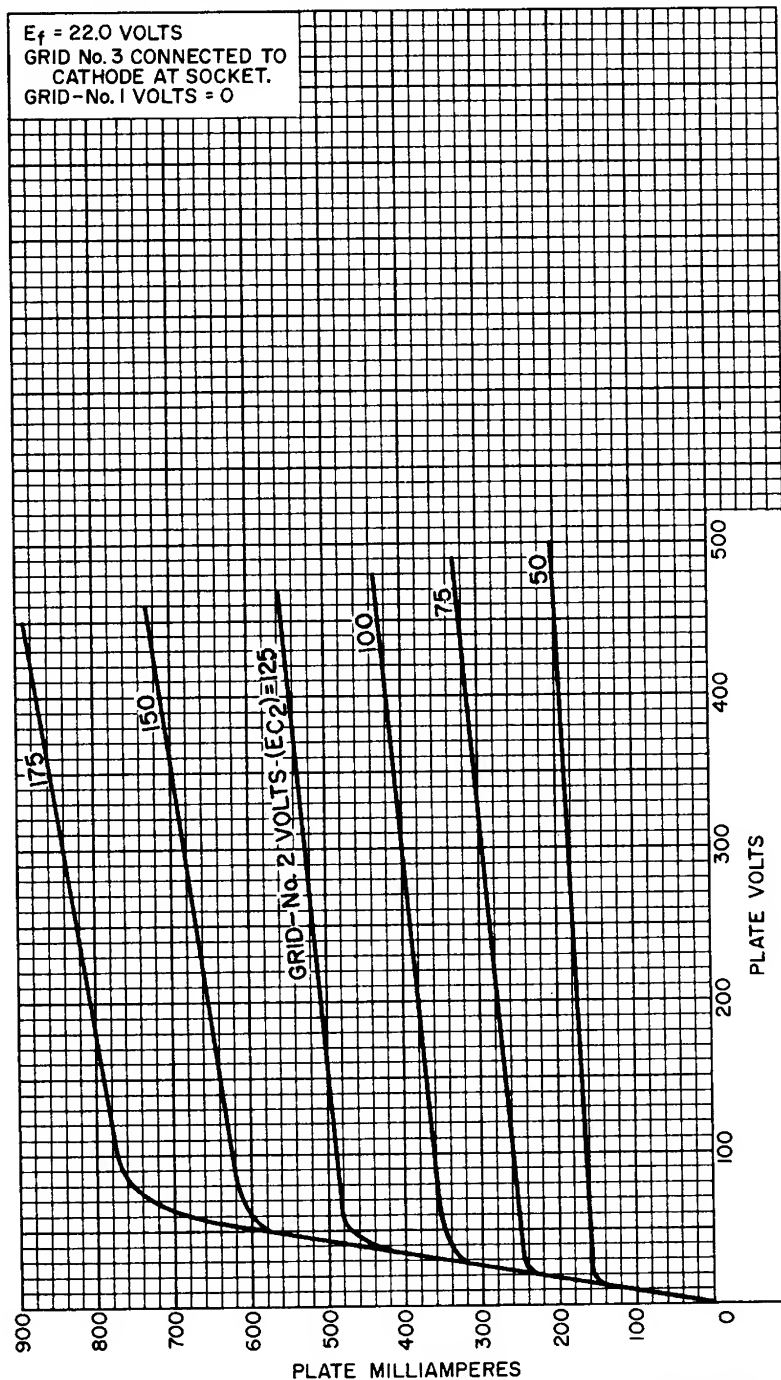

92CM-12652

RADIO CORPORATION OF AMERICA
Electronic Components and Devices
Harrison, N. J.

